


Component List




A1 x1
Male bottom frame

A2 x1
Female bottom frame

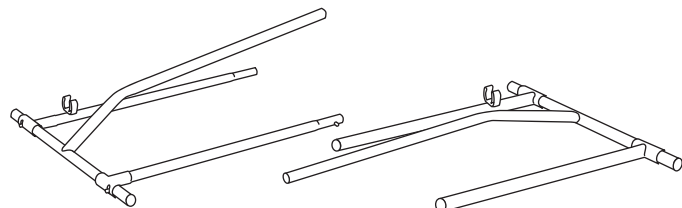


B x4
End cap


(May be assembled on the A.)



C x2
Center pole

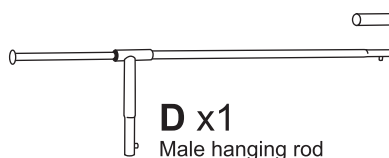

D x1
Male hanging rod

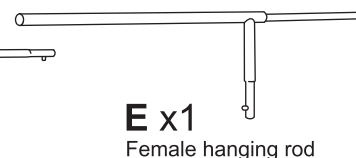

E x1
Female hanging rod



G x4
17mm Nut



H x4
Lock washer



I x1
Wrench



F x4
Wheel

NOTE: 2 of the wheels have locking mechanisms.

Assembly Time:
Less than 15 minutes.



This product's intended use is for hanging garments.

Tools Needed: No additional tools required. Wrench (I) provided.

STEP 1. Start at the bottom insert the male bottom frame (A1) into the female bottom frame (A2). Install the four end caps (B) onto the ends of the bottom frames.

STEP 2. Insert the two center poles (C) into the ends of (A1 & A2). Insert the male and female hanging rods (D & E) together. Insert (D & E) assembly into the top of the center poles (C).

STEP 3. Insert the wheels (F) into the bottom of the assembled garment rack. Insert each locking washer (H), then each nut (G). Tighten each nut with the wrench (I).

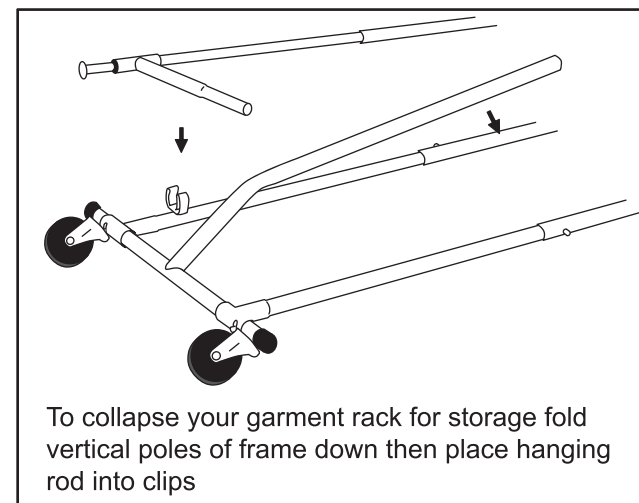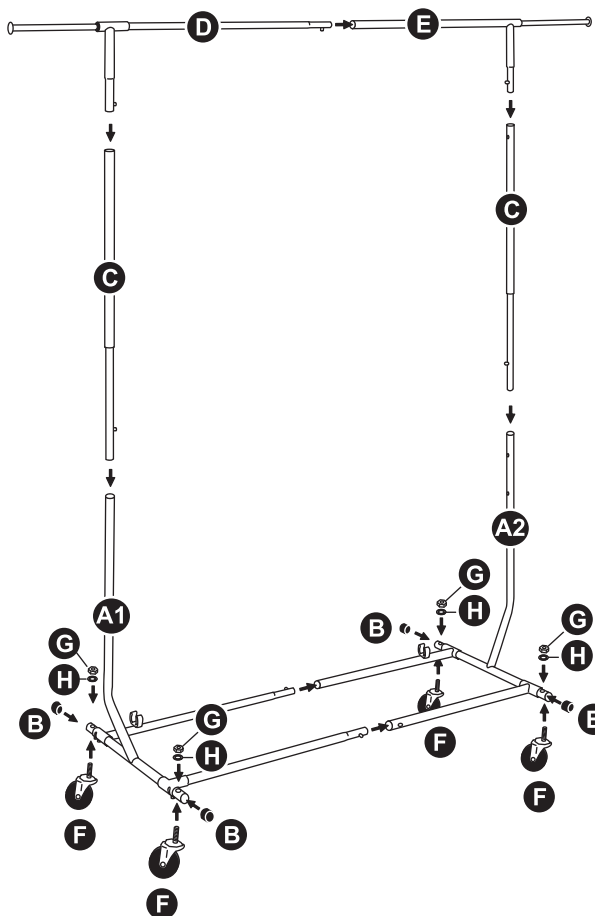

Single Rail Garment Rack Hanger

SKU# Hanger-1938A-S-SI

Max. Load capacity: No more than 80kg for stationary state and total no more than 30kgs for dynamic & moving.

Use of the environment: Indoor, Warm and Dry

Made in China

